




# CSP/MICRO BGA Test & Burn-in Socket For Devices From 14 - 27mm Sq.

## FEATURES:

- For Test & Burn-In of CSP, MicroBGA, DSP, LGA, SRAM, DRAM and Flash Devices.
- Any pitch device on 0.50mm or larger.
- Pressure mounting, no soldering required.
- 4 Point crown insures "scrub" on solder oxides.
- Signal path during test only .077" (1.92mm)
- Accommodates any package up to 27mm<sup>2</sup>.
- Small overall socket size/profile allows maximum number of sockets per BIB and BIB's per oven, while being operator friendly.
- **SPECIFICATIONS:**
- Molded socket components are UL94V-0 PEEK and/or Ultem.
- 1dB Bandwidth at 10.1Ghz (0.80mm pitch) (large probe).
- Estimated Contact Life: =500,000 cycles.
- Compression spring probes are heat treated Beryllium Copper Alloy with 30u" min. [.75um] Gold per Mil-G-45204 over 30u" min. [.75um] Nickel per QQ-N-290.
- Contact Force = 9-12g per contact on 0.50 - 0.75mm pitch  
17-20g per contact on 0.80mm pitch or larger.
- Operating Temperature = -55°C (min.) to 150°C (max.); -67°F (min.) to 302°F (max.).
- All Hardware is Stainless Steel.
- Typical Burn-in Temperature = 125°C.

## MOUNTING CONSIDERATIONS:

- Aries supplies (4) four #4-40 screws and tapped, insulated, backing plate for mounting.
- Sockets must be handled with care when mounting or removing sockets to/from PCB.
- Test board PCB diameter = .026" (0.66mm) (large probe)  
= .016" (0.40mm) (small probe)

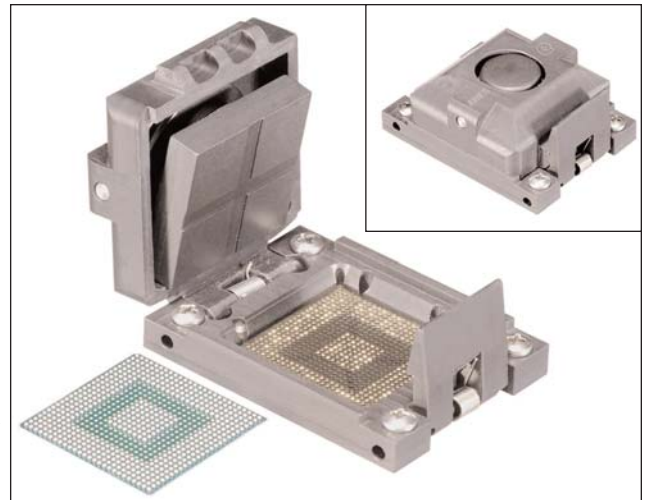


*Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.*

## ORDERING INFORMATION

CONSULT FACTORY

**PATENT PENDING**

**Click for Datasheet 23017  
for packages up to 13mm**

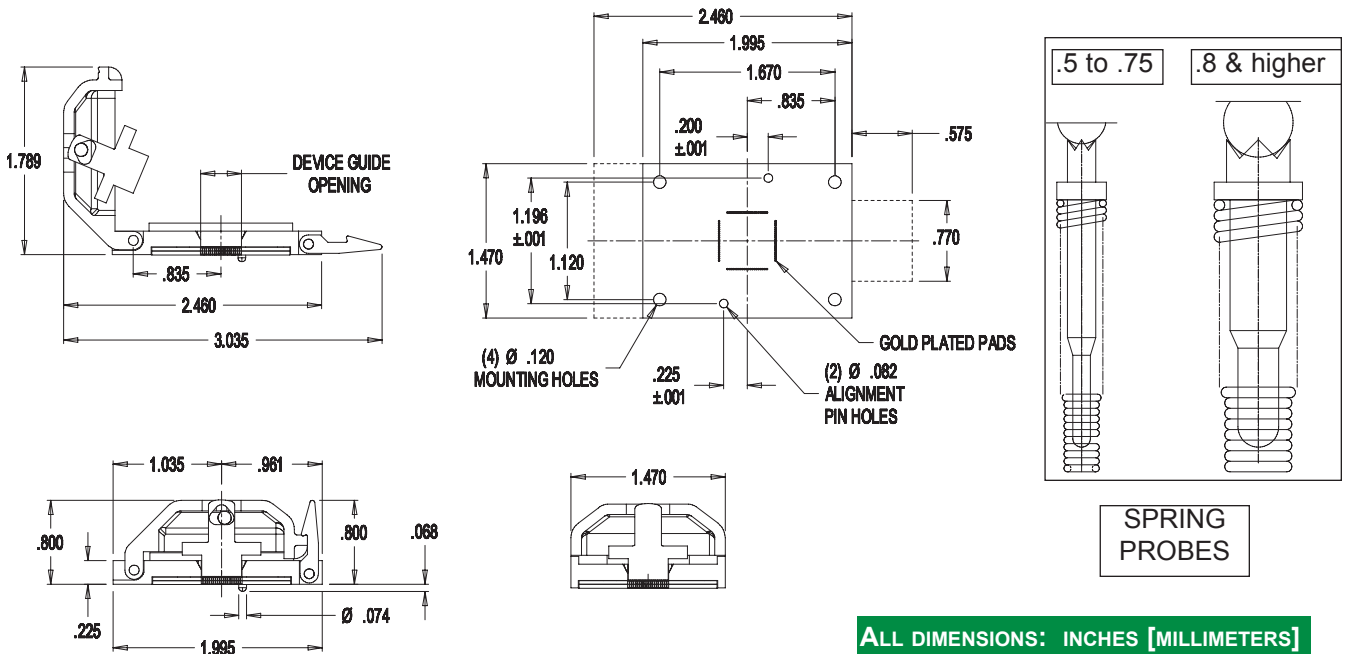

**ALL DIMENSIONS: INCHES [MILLIMETERS]**

**ARIES**  
ELECTRONICS, INC.  
http://www.arieselec.com • info@arieselec.com

**NORTH AMERICA**  
Frenchtown, NJ USA  
TEL: (908) 996-6841  
FAX: (908) 996-3891



**UK/IRELAND/GB**  
TEL: +44 870 240 0249  
FAX: +44 1653 690980  
uking@arieselec.com

**EUROPE/MAINLAND/HOLLAND**  
TEL: +31 78 615 94 65  
FAX: +31 78 615 43 11  
europe@arieselec.com

23018  
REV. A