


# CUSTOMER DRAWING ONLY

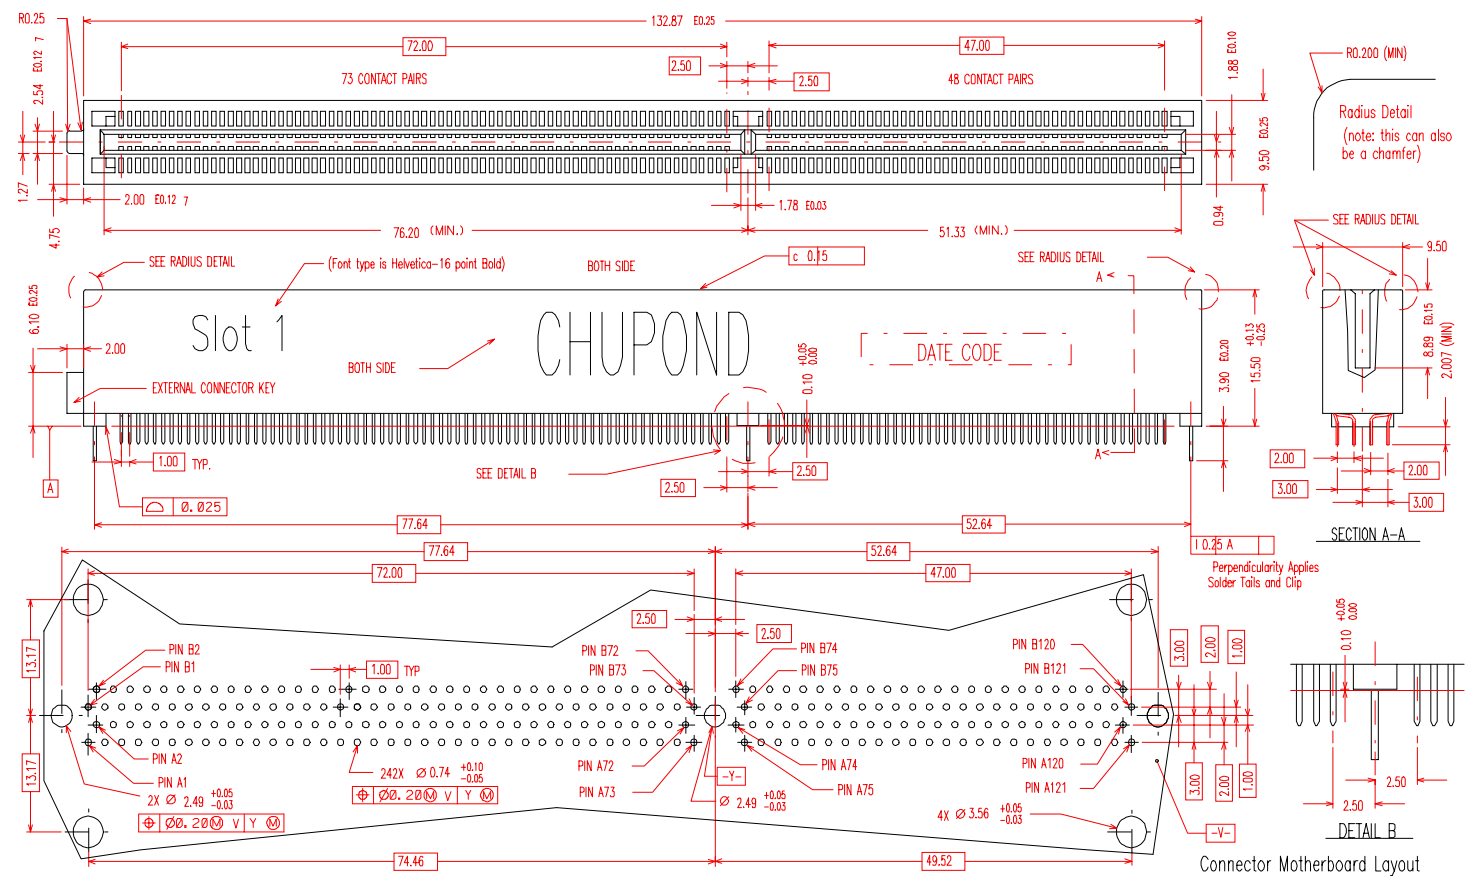

<b>Drawn By:</b> LJ, H	<b>Checked By:</b> H.H.	Contact: Phosphor Bronze, plated 2μ"Au over 15μ"PdNi over 50μ"Ni Solder tail: plated 100μ" SnPb over 50μ"Ni Housing: Glass-filled PCT, color brown, UL94V-0	<b>Chupond America, Inc.</b> 6168 Greenhill Rd., New Hope, PA 18938-9630 USA
<b>Drawn:</b> 5/23/97	<b>Scale:</b> None	Contact Resistance: 30 milliohms max; <b>Current Rating:</b> 0.5 A per contact Dielectric Withstanding Voltage: 500VAC Min Insulation Resistance: 100 megohms min; <b>Operating Temp:</b> -55°C to +125°C Insertion per Contact/pair: 94g max; <b>Withdrawal per Contact/pair:</b> 56 g max	<b>TITLE: Slot 1 for Pentium II</b>
<b>Released:</b> 7/25/97	<b>Sheet 1 of 1</b>	<b>Tolerances: +/- .25mm +/- 3°</b>	<b>ENG. #: 0206-242-02-C</b> Rev.

This drawing contains information proprietary to Chupond America, and cannot be used without permission