CUSTOMER DRAWING ONLY

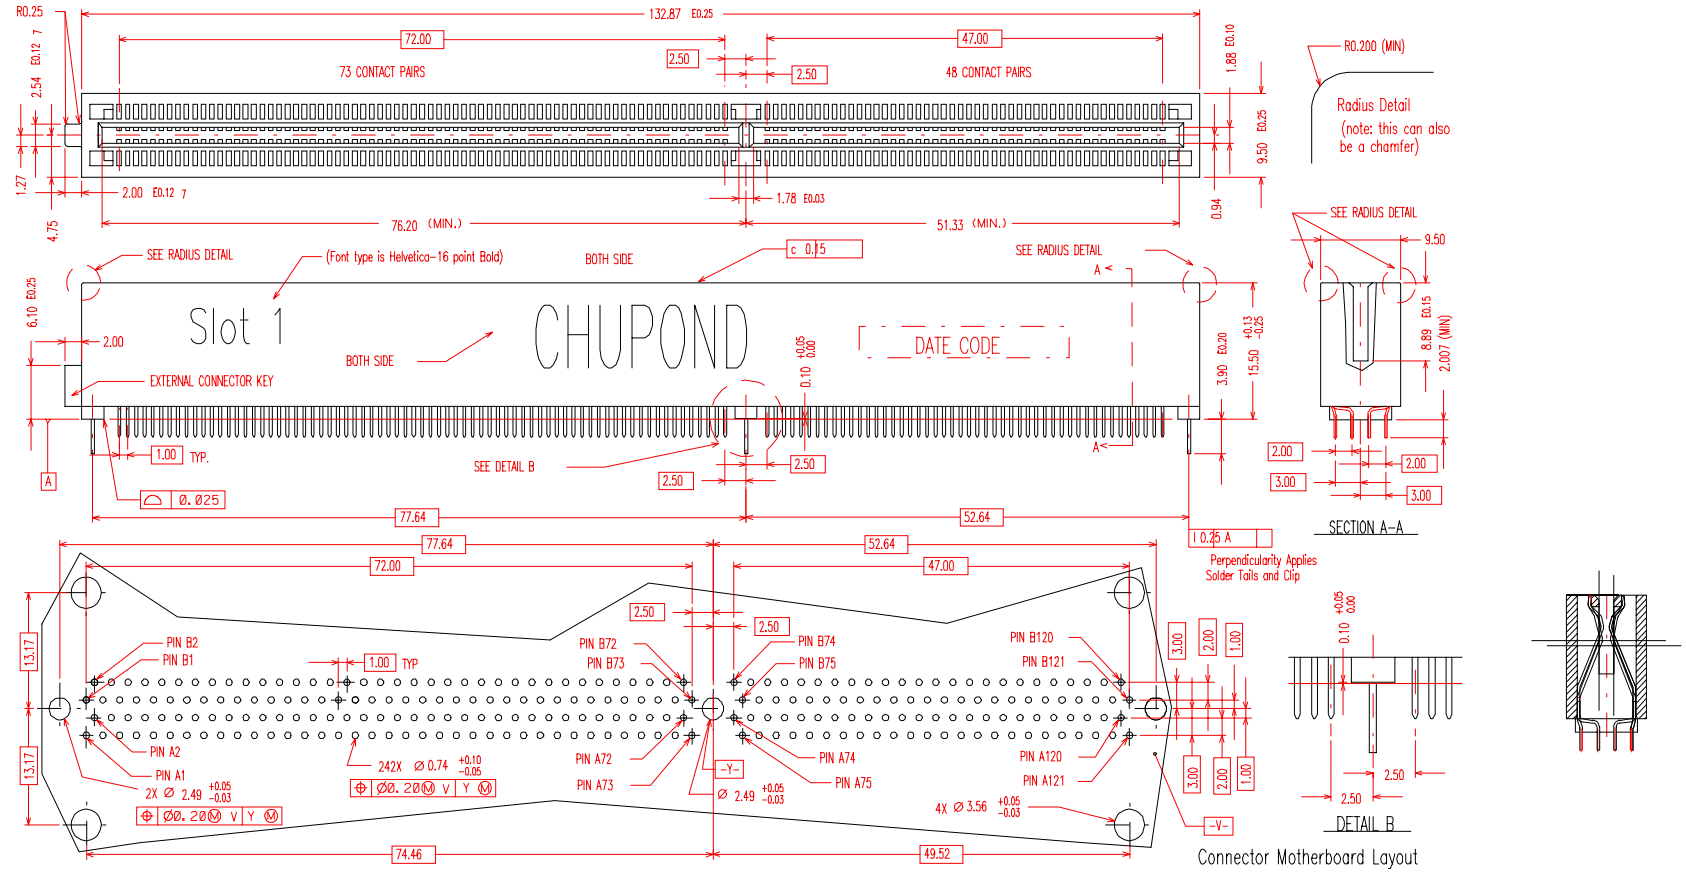

Drawn By: LJ, H	**Checked By:** H.H.	**Contact:** Phosphor Bronze, plated 2µ"Au over 15µ"PdNi over 50µ"Ni **Soldertail:** plated 100µ" SnPb over 50µ"Ni **Housing:** Glass-filled PCT, color brown, UL94V-0	CAI **Chupond America, Inc.** 6168 Greenhill Rd., New Hope, PA 18938-9630 USA
Drawn: 5/23/97	**Scale:** None	**Contact Resistance:** 30milliohms max; **Current Rating:** 0.5 A per contact **Dielectric Withstanding Voltage:** 500VAC Min **Insulation Resistance:** 100 megohms min; **Operating Temp:** -55ºC to+125ºC **Insertion per Contact/pair:** 94g max; **Withdrawl per Contact/pair:** 56 g max	**TITLE:** **Slot 1 for Pentium II**
Released: 7/25/97	**Sheet 1 of 1**	**Tolerances: +/- .25mm +/- 3°**	**ENG. #:** **0206-242-02-C** **Rev.**

This drawing contains information proprietary to Chupond America, and cannot be used without permission