


CUSTOMER DRAWING ONLY

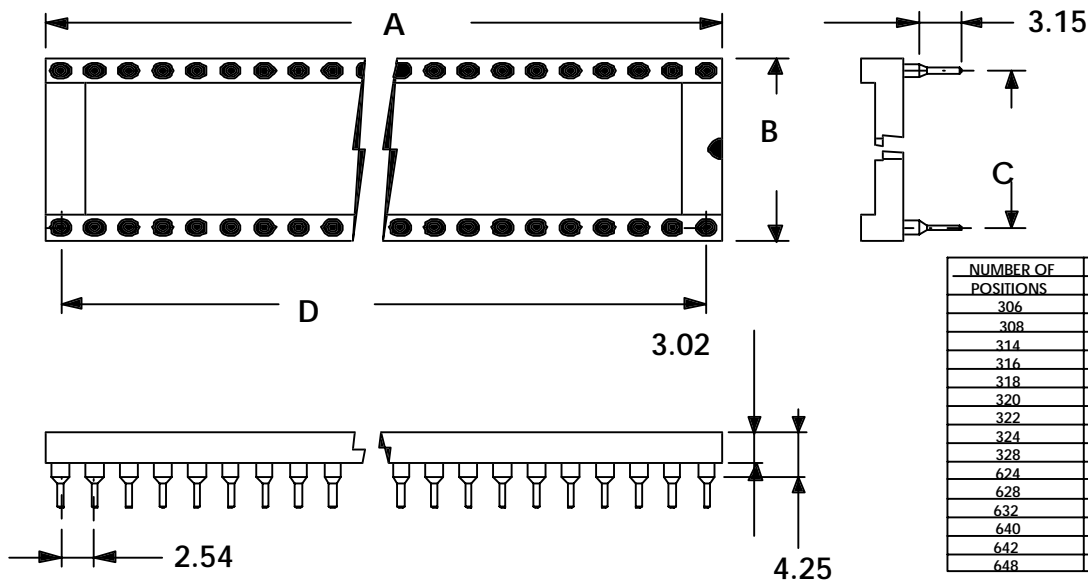

| NUMBER OF POSITIONS | DIMENSIONS | | | |
|---------------------|------------|-------|-------|-------|
| | A | B | C | D |
| 306 | 7.62 | 10.64 | 7.62 | 5.08 |
| 308 | 10.16 | 10.64 | 7.62 | 7.62 |
| 314 | 17.78 | 10.64 | 7.62 | 15.24 |
| 316 | 20.32 | 10.64 | 7.62 | 17.78 |
| 318 | 22.86 | 10.64 | 7.62 | 20.32 |
| 320 | 25.40 | 10.64 | 7.62 | 22.86 |
| 322 | 27.94 | 10.64 | 7.62 | 25.40 |
| 324 | 30.48 | 10.64 | 7.62 | 27.94 |
| 328 | 35.56 | 10.64 | 7.62 | 33.02 |
| 624 | 30.48 | 17.75 | 15.24 | 27.94 |
| 628 | 35.56 | 17.75 | 15.24 | 33.02 |
| 632 | 40.64 | 17.75 | 15.24 | 38.10 |
| 640 | 50.80 | 17.75 | 15.24 | 48.26 |
| 642 | 53.34 | 17.75 | 15.24 | 50.80 |
| 648 | 60.96 | 17.75 | 15.24 | 58.42 |

PART NUMBERING
0800-X XX -XX

DIP Spacing (3,4,6 or 9)
of Pins

Contact Plating:
05 - (5μ" Au)
10 - (10μ" Au)
30 - (30μ" Au)

| | | | |
|----------------------|--------------------|--|---|
| Drawn By: LJ, H | Checked By: PFR | Material: Insulator: PBT, UL94V-O; Pin: Brass 1/2 Hard; Contact: BeCu | Chupond America, Inc. 6168 Greenhill Road, New Hope, PA 18938 USA |
| Drawn: 11/4/94 | Scale: None | Plating: As stated with 50μ" Ni underplating | |
| Released: 11/4/94 | Sheet 1 of 1 | Tolerances: ± 0.120; ± 0.25; and ±2° | ENG. #: 0800-XXX-XX Rev. A |