


Straight gravity-feed

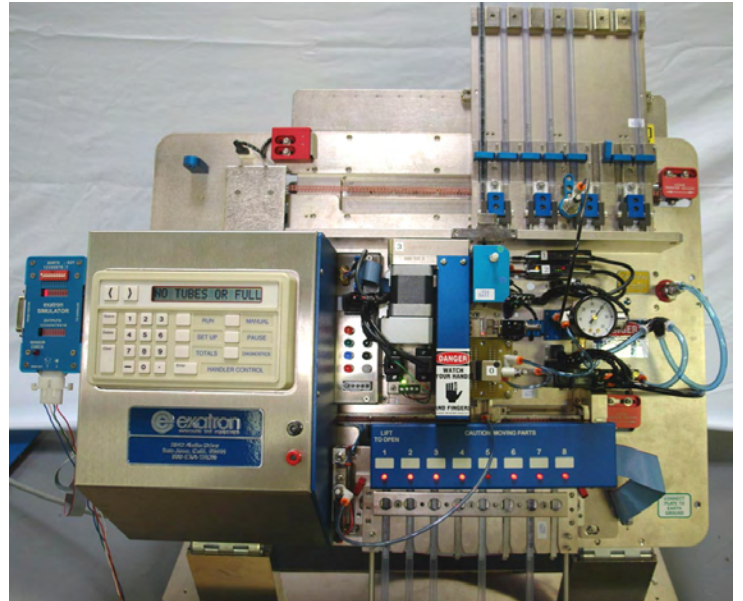

**Gravity-feed with optional pickup head
from index to test site to shuttle**

System Features & Options

- Tube-to-tube input-testing-output
- Conventional & plunge-to-board RF contacts
- Eight output sorts
- Tabletop mount with adjustable tilt angle
- EMO safety switch
- Quick changeover kits for:

PLCC
SOIC
SSOIC
SOJ
SIP
DIP
TSSOP
MLF
QFN
XTAL

Custom devices

Options:


Bowl feeder input
Pickup head
Multiple test sites
Direct-dock interfaces
MEMS testing
Light pole
Floor stand with tilt angles of
15, 30, 45, 60, 75, 90° (flat)
Metal output tubes
Output tray with optional
individual output counters




**Model 3000B on stand
with hi-pot tester attached**



Options

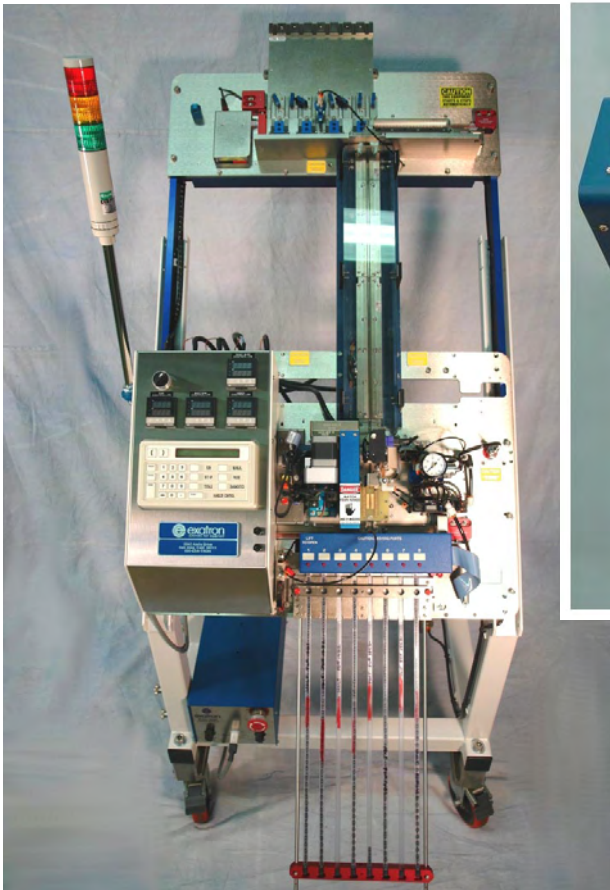


Hot rail input (Model 3080 on stand)

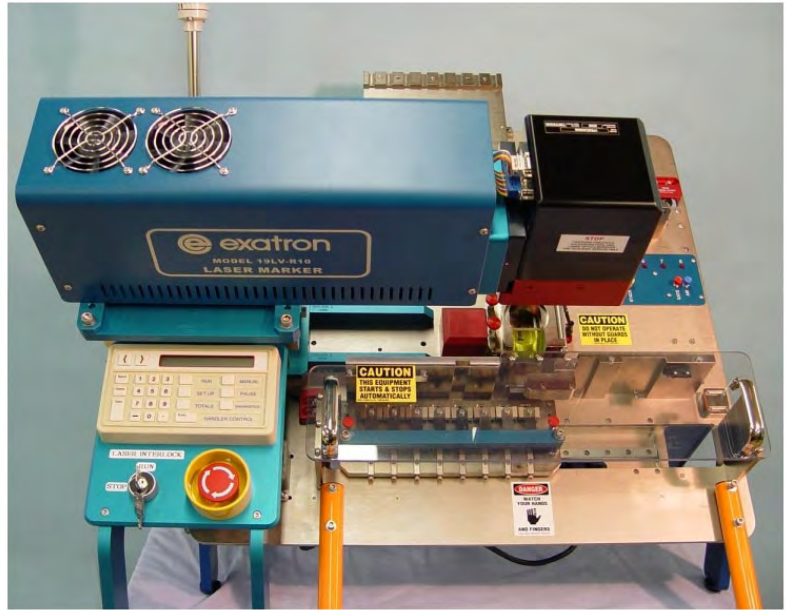

Laser marker integrated (Model L4)



Stand with frame tilt angle adjuster

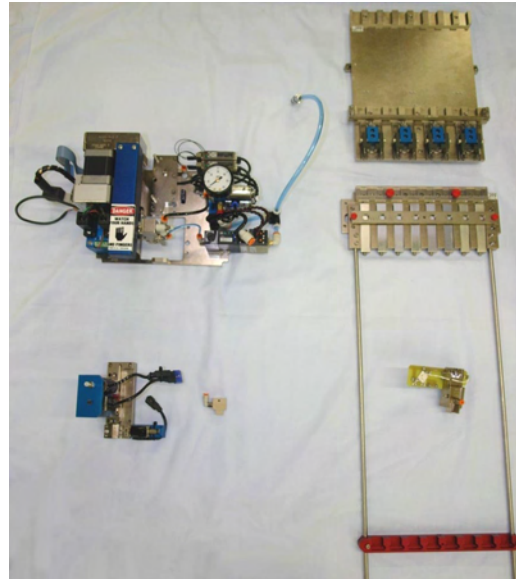

Changeover kits for additional device sizes



Clear safety cover



Individual output counter display



exatron, 2842 Aiello Dr., San Jose, CA 95111-2154 www.exatron.com
1-800-EXA-TRON 408-629-7600 Fax: 408-629-2832 www.pisockets.com