


Model 5000 with taper output

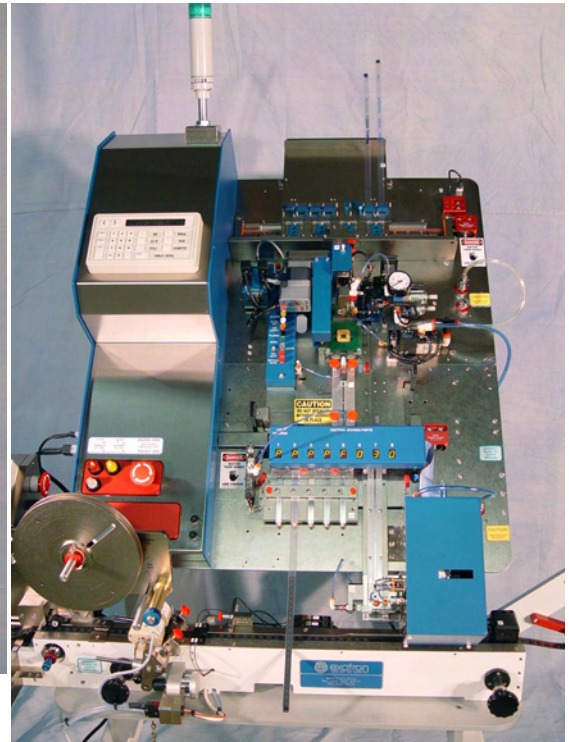

System Features


- Eight-tube octoloader input
- Conventional & plunge-to-board RF contacts
- Eight output sorts with tubes, *or*
- Six output sorts with tubes & taper
- Floor mount frame with adjustable tilt angle
- EMO safety switch
- Quick changeover kits for:

PLCC
LCC
SOIC
SSOIC
SOJ
SIP, DIP
TSSOP
MLF
QFN
XTAL
Custom devices


Options:

Bowl feeder input
Pickup head
Multiple test sites
Direct-dock interfaces
MEMS testing
Programming
Laser marking
Light pole
Tilt angles of 35, 45, 55°
Metal output tubes
Taper output
Output tray with optional individual output counters


Model 5000
with tube
output

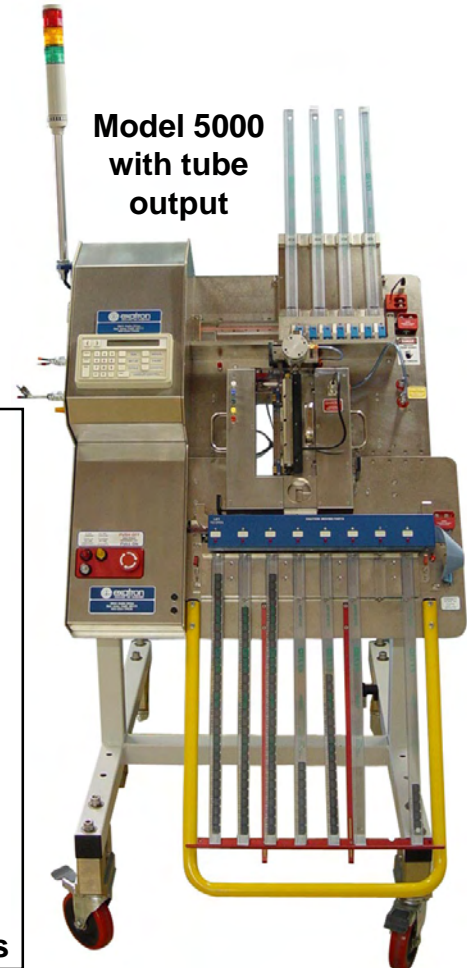

Options

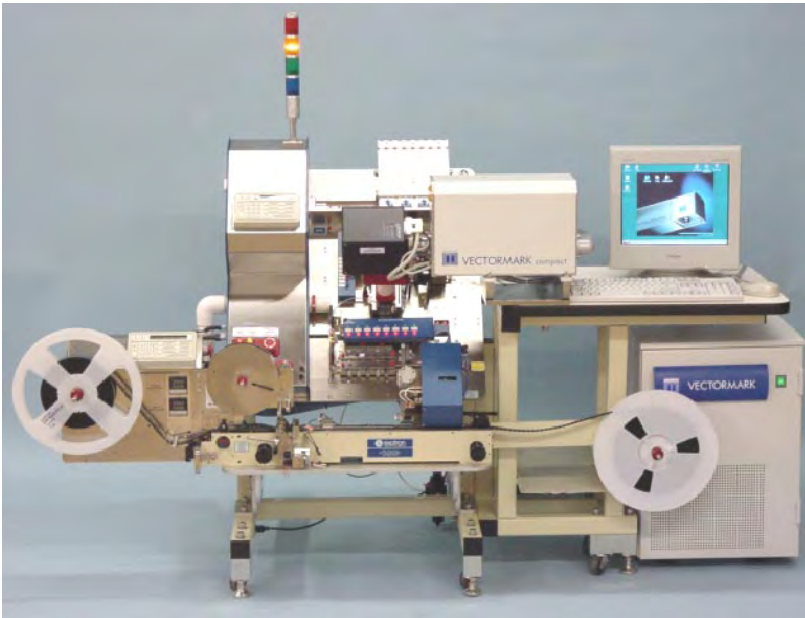


Model 5000 with laser marker & taper output

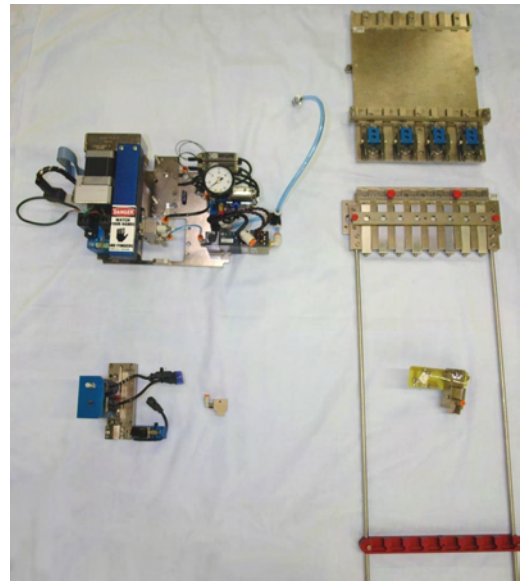

Changeover kits for additional device sizes




Model 5000 with laser marker & tube output

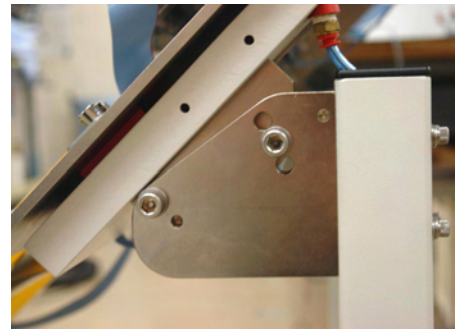


Tilt mechanism



Clear safety cover

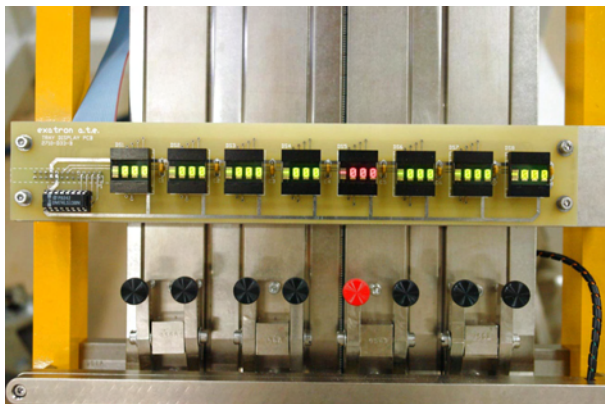

Individual output counter display

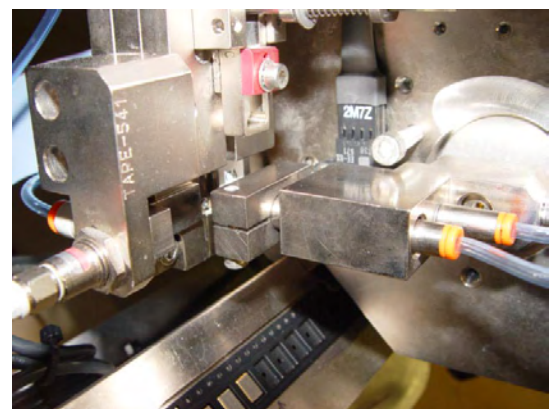

Taper swing arm getting device from output staging



exatron, 2842 Aiello Dr., San Jose, CA 95111-2154 www.exatron.com
1-800-EXA-TRON 408-629-7600 Fax: 408-629-2832 www.pisockets.com