


Model 5080


Hot Chamber and other Custom Variations



- Ambient to 165° C operation
- Chamber holds up to 8 full tubes of devices
- Independent track soak time control
- Chamber control to +/-2° C, 12 control zones
- Test site control to +/-1° C, up to 4 zones
- Laser mark / tape & reel options
- Change over in 15 minutes or less
- Large test head direct dock


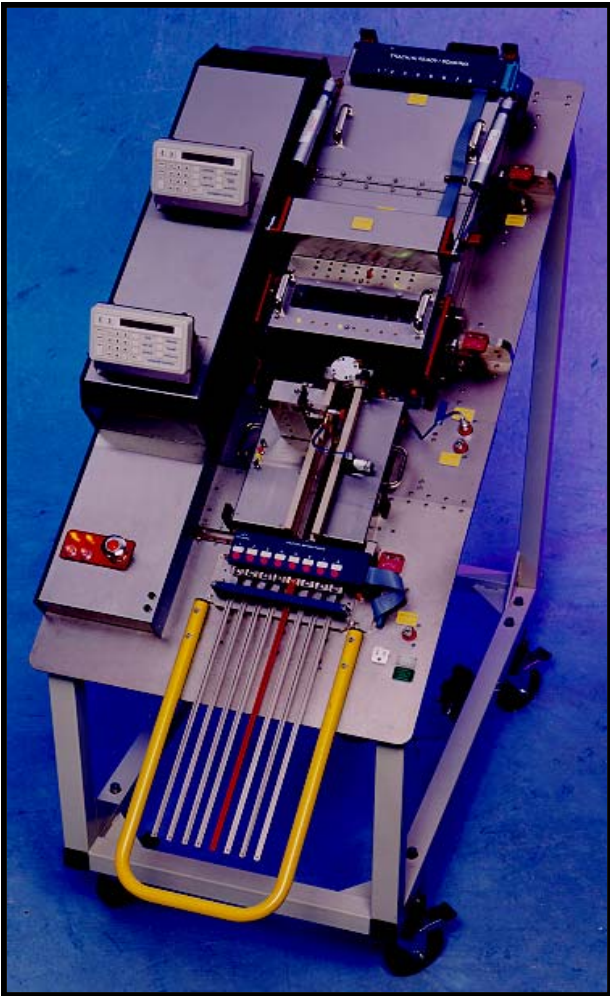


Model 5080 with laser mark and dual ambient test site input for an all-in-one PLD program & test & mark system. The blank PLDs take twice as long to program as to test. This system runs 6 to 1 times faster than separate program & test & mark machines.

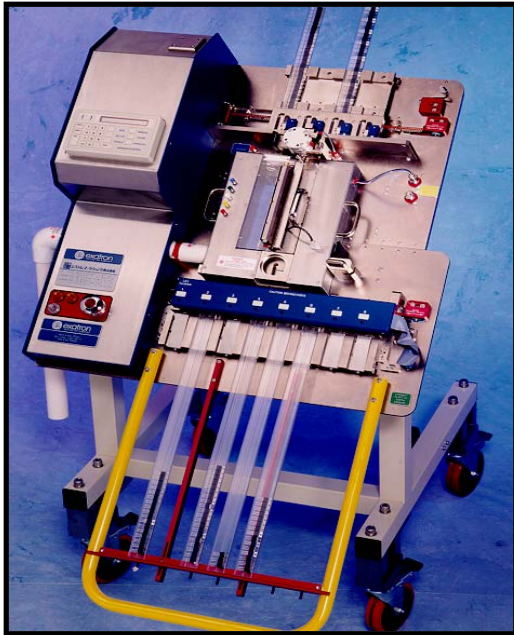


**Wide sort 5000
for power devices
4 in-line
high power test contactors**

**Model 5000-2
In-line dual test sites
for Program & Test
application**

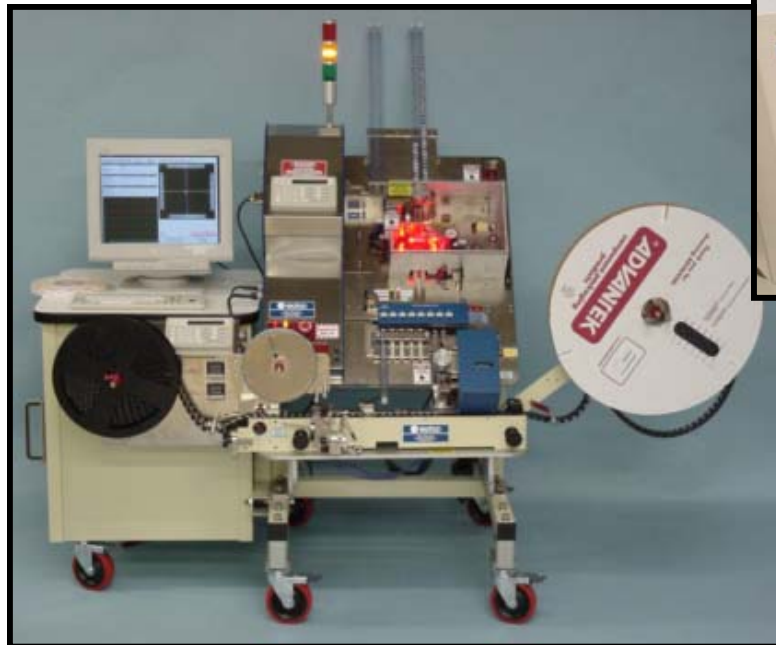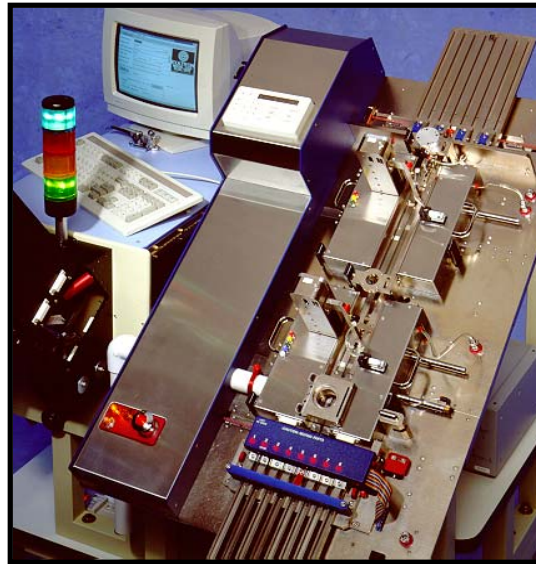

**Model 5000 with 3D SOIC inspection
and Model 1050 Tape & Reel output**

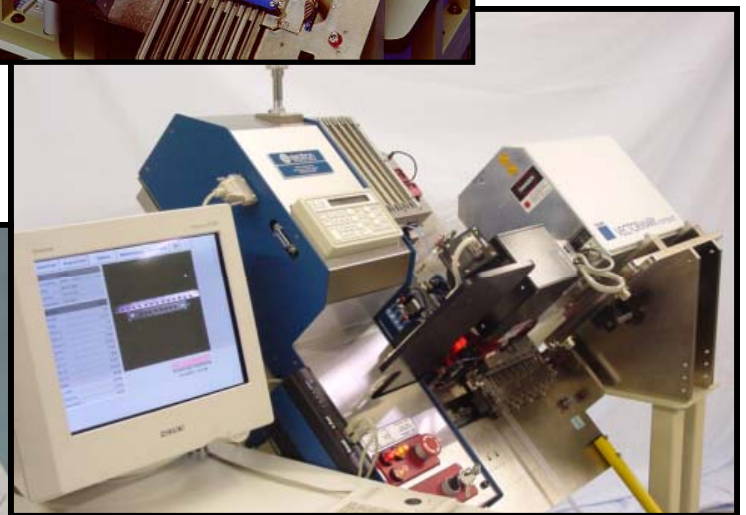

**Custom 5000 with camera
positioning system for precise
laser cutting application**